




BYD K9UD electric bus specifications

Parameter	
L/W/H	12,200×2,550×3,370 mm
Wheelbase	5,900 mm
Front/rear overhang	2,850/3,450 mm
Angle of approach/departure	7°/7°
Boarding height	325/340/340(mm) 325/340(mm)
Height of floor above road	370 mm
Type of gangway	Low floor for all gangway
Gangway width between wheel arch	910/495 mm (Independent suspension) 845/495 mm (Non-independent suspension)
Doors	2-2-2 (Three doors) 2-2 (two doors)
Clear door width)	1180/1200/1200mm (Three doors) 1180/1200mm (two doors)
Speed limited	70 km/h 80 km/h (optional)
Acceleration time 0~30km/h 0~30km/h acceleration time	≤9s
Acceleration	1.0-1.2m/s ²
Max. climb gradient	15%
Turning circle	≤24 m
Front axle loads,max	7.5t
Rear axle loads,max	12t
GVW	19.5t
Power battery	BYD Fe Battery, 422 kWh
Range under SORT 2*	300km
Charging power	DC Combo2 100 kW DC Combo2 100 kW*2 (optional)
Charging position	Right front
Seats	34 (can be customized)
Passenger capacity	Customized

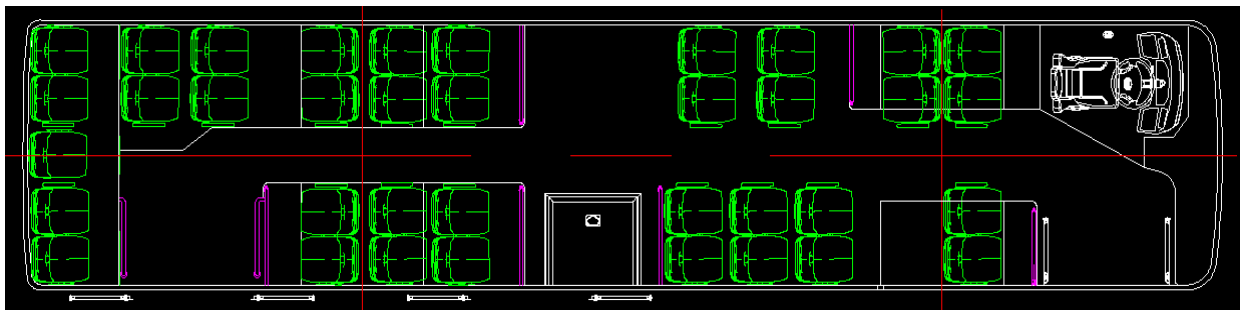

Description Standard :● optional:○ none: -